



- 1** Connect to Network and Monitor  
Connect HDMI out on Odyssey to HDMI input on Monitor. Then connect the network. Power is provided over ethernet (PoE), or by a DC power supply.

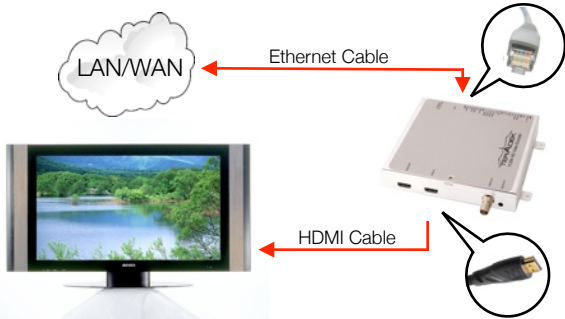


- 2** Browse Network to Locate Odyssey  
Open your web browser. Use Bonjour to browse and locate the decoding Odyssey on the network. Odyssey is displayed by it's Friendly Name, which represents the configuration and capabilities of the unit.

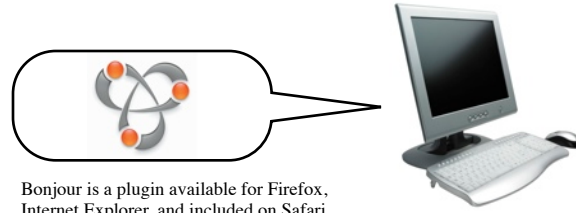


Bonjour is a plugin available for Firefox, Internet Explorer, and included on Safari. Bonjour discovers networked Zero Configuration Networking devices. For more, see section 7 of the user manual.

- 3** Login to Odyssey's Web Interface  
In the Login and Password boxes, type **root**, then click **Login**.

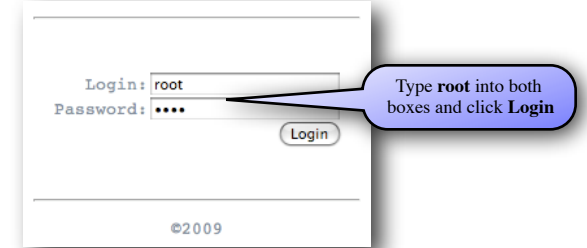


## System Diagram

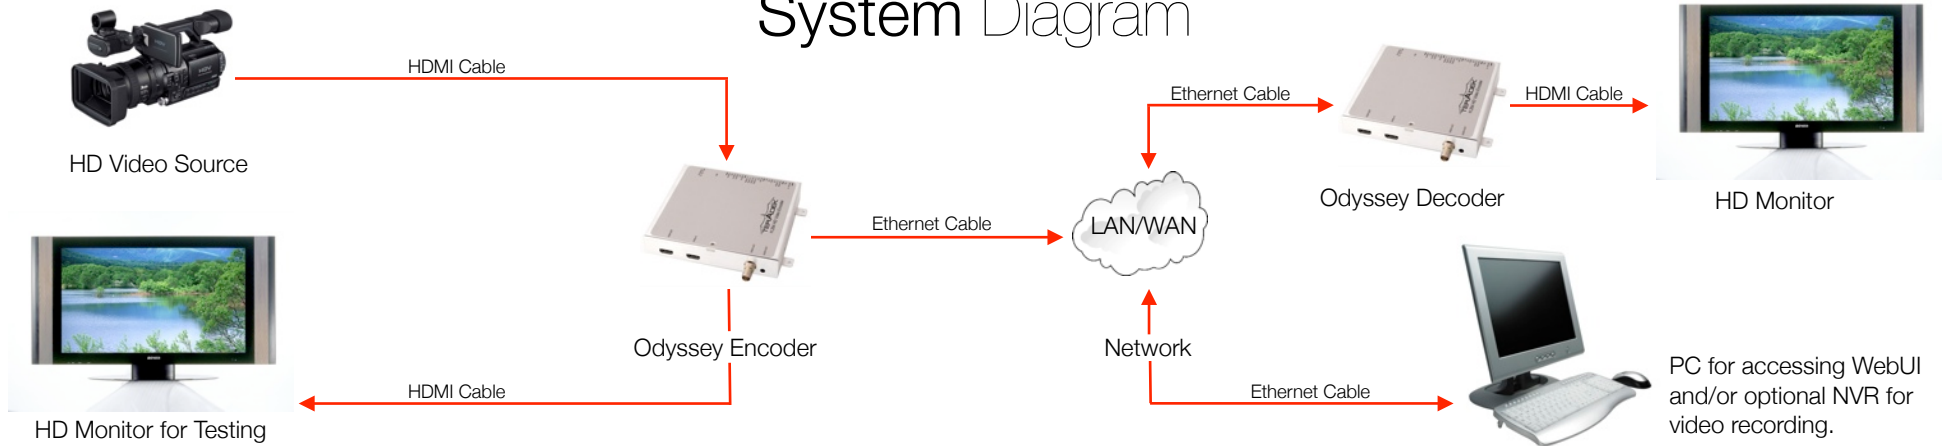


- 4** Ensure Streaming Video is Present  
Navigate to the Live Video window of the WebUI. Names of all reachable video streams will appear in the Stream List.

Click Video, then Live Video to reach the Live Video screen.




Reachable video streams appear here.

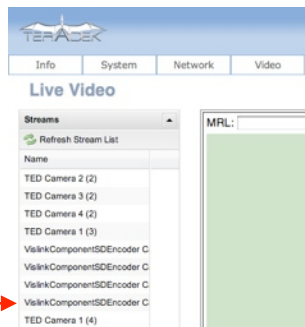


- 5** Drag Video Streams to Cameos  
Drag a video stream into a cameo to ensure that video is actually streaming.

Your browser must have the VLC plugin installed to view video. See section 28 of the Reference Guide for more information.

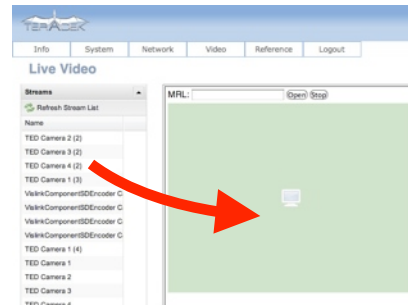

- 6** Assign Streams to Decoder Output  
Navigate to the Decoder Settings menu in the WebUI. All available video streams are displayed here. Drag & Drop up to 1HD or 4 SD streams into the Decoder boxes, then click Apply. Video appears on your monitor.

You may select individual SD streams from separate encoding Odyssey units.

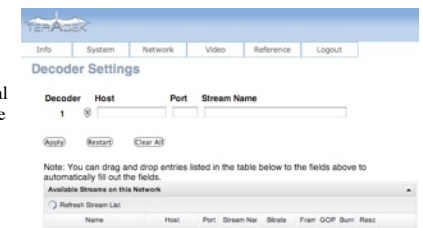

# Troubleshooting Guide

I can't find Odyssey with Bonjour.

Check to ensure that all network firewalls are disabled. If hardware firewalls or other filtering devices are present on the network between Odyssey and the client system, try moving Odyssey to a new network location that is not filtered by these devices.

If there are no firewall issues, please note that the Friendly Name displayed by Bonjour most likely will not include the word "Odyssey"

Why are the cameos on the Live Video page of the WebUI Black?

The screen is black when the video stream is experiencing a disruption between Odyssey and the client PC. A black screen that persists for longer than 20 seconds may be a symptom of firewall or antivirus interference with the video stream.

Why are the cameos on the Live Video page of the WebUI Blue?

A blue screen indicates that a good connection between the WebUI and Odyssey exists, but Odyssey has experienced video loss and is not encoding video.

I see video, but there is no sound.

In the Video Input Settings menu, check that HDMI Audio is selected in the audio field.

What are the default network settings?

- IP Address: 192.168.1.200
- Netmask: 255.255.255.0
- Default Gateway: 192.168.1.1
- DNS Server: 192.168.1.1
- Device Hostname: odyssey
- Zero Configuration Friendly Name: odyssey



8001 Irvine Center Drive, Suite 400  
Irvine, CA 92618  
Telephone: +888 941 2111  
support@teradek.com  
www.teradek.com

Quick  
Start  
Guide

Decoder  
Installation

Odyssey  
1HDc  
by  
Teradek